



KD-STEEL STRUCTURES BY JOHNSON BUILDING SYSTEMS

WIDE SELECTION OF PRE-ENGINEERED BUILDING SYSTEMS

KD-TUBULAR STEEL FRAMES

All Steel frames are 5' o.c., designed and engineered to meet or exceed the load requirements by most building codes.


Our frame system is engineered for 40 lb. Snow load and 90 mph wind load with no bracing. With bracing we can go to 16' high by 30' wide and as long as required.



The Most Versatile Framing Systems Available

Standard Frame Package as Shown:
2" x 3" - 14 Gauge Galvanized Steel Tubing

- 2" x 3"
- 2" x 4"
- 3" x 3"
- 4" x 4"

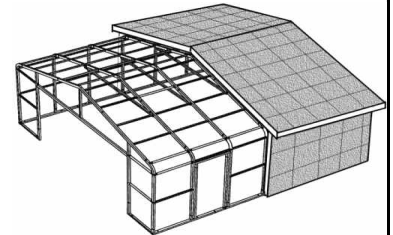

Optional Solid Core Insulated or Non-Insulated Panels can be used




26 Ga. Galvanized
Color as Selected



VBR-450 (R-22)



SOL-R-BLOCK (R-13.5 / 23.5)




TIMBER LINK TILT-UP FRAMING SYSTEMS

Solid Core Structural (SIPS)
Insulated Panels





HEAVY DUTY RIGID FRAME SYSTEMS

is a cleaner system for large food, Chemical, Pharmaceutical, and Industrial applications.



- RIGID FRAME**
200' CLEAR
- SS-MULTI-SPAN**
600' WIDE
- MULTI-SPAN**
600' WIDE
- SINGLE SLOPE**
150' CLEAR
- STRAIGHT COLUMNS**
70' CLEAR
- LEAN-TO**
20' WIDE
- MULTI-SPAN STRAIGHT COLUMNS**
300' WIDE
- LEAN-TO**
20'+ WIDE

The 45" Wide Polyurethane Insulated Panel (FM-UL tested) has a Thermal-Lock tongue and groove connection. Available 2-3/4" to 5" thickness.



SIMPLY THE EASIEST BUILDING TO ERECT AND RELOCATE IN THE INDUSTRY!



JOHNSON BUILDING SYSTEMS, INC.

975 Jaymor Road - Southampton, PA 18966-3854

• (215) 673-6050 • FAX: (215) 322-2076 •

E-mail: INSOLRAE@aol.com

www.JohnsonEnergyGroup.com

1-800-445-7249


**ALL-BOLTABLE SYSTEMS!
PERMANENT OR TEMPORARY
7 YEAR TAX DEPRECIATION!
SHIP ANYWHERE**

SUPPLY AND DESIGN



POLYURETHANE INSULATED WALL AND ROOF PANEL SYSTEMS


VERY BEST "R" PANEL FOR SYSTEMS CONSTRUCTION

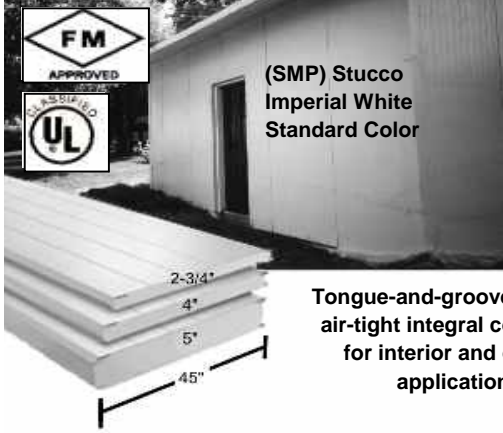

Model/Thickness	R-Value	STC
VBR 450 - 2.75"	R-22	22
VBR 450 - 4"	R-32	23
VBR 450 - 5"	R-40	24

Interior Partition Panel with shadowline profile
 Field Caulk Ambient Side with Non-Drying FSI-96 Butyl from INSOLRAE Building Products.

Tongue-and-groove joint with air-tight integral connection for interior and exterior applications.




STOPS INFILTRATION AND AIR LEAKAGE




METAL SHIELD POLYURETHANE FACTORY FOAMED INSULATED PANELS

EW150 Highly efficient exterior wall panel with the traditional ribbed look. Three-inch thick (R-24) model is a very popular and the economical choice for insulated siding for pre-engineered rigid frame industrial buildings.




PW-250 is the non-ribbed version of the EW-150. Flush profile with light vertical shadowlines. Ideal for exterior wall and roof applications on commercial and industrial buildings, as well as for interior partition walls in certain cold storage facilities.



RW-350 versatile insulated panel is equally impressive for exterior wall or roof applications. Great roof panel for commercial buildings, and cold storage buildings applications.



RD-500 For exterior low temp and industrial roof application with shadowline profile. This structural roof deck panel delivers an excellent thermal R-value performance. It is expressly efficient for commercial warehouse and industrial buildings leaving a white USDA painted exposed ceiling surface.



PANEL EXTERIOR AND INTERIOR FINISH
 26 Ga. white stucco embossed G90 galv. steel with High Performance Coating for cold storage applications.
 20-year warranted performance for both.

FIRE RATINGS - Wall panels available with Class 1 E-84 flame spread rating of 25 or less, and smoke developed of 190 or less. This test is identified as UL1715, or UBC 26-3, and approved by Uniform Building Codes Section 2602.6 and 2603.8 respectively. Sprinkler System May Be Required. No CFC's, no carcinogens.

NOISE, MOISTURE, TEMPERATURE CONTROL AND NON-COMBUSTIBLE

